


Coffaire Recessed Fluorescent **CFH1GPF**

Page 1 of 2

Direct/Indirect – 1' x 4' with New Perforated Basket
Air Return/Static, 1 Lamp or 2 Lamp T8 or T5



Features

- Direct/indirect lamp shield appearance with soft contoured interior.
- Perforated mesh lamp shield with white acrylic overlay.
- 52.1% efficient (2 lamp T8).
- 55.7% efficient (2 lamp T5).
- Only 5-1/2" deep.
- Same fixture fits both G and T ceiling types.
- Fits flush to face of slot grid (T) ceiling.
- Air return standard (meets UL requirements).
- Lamp shield hinges from either side.
- Can be continuous row mounted.
- Wiring access plate standard.
- 2 earthquake clips standard.
- Housing is 20 gauge steel, meets NYC Code requirements.
- Construction to meet Chicago Plenum requirements is available.



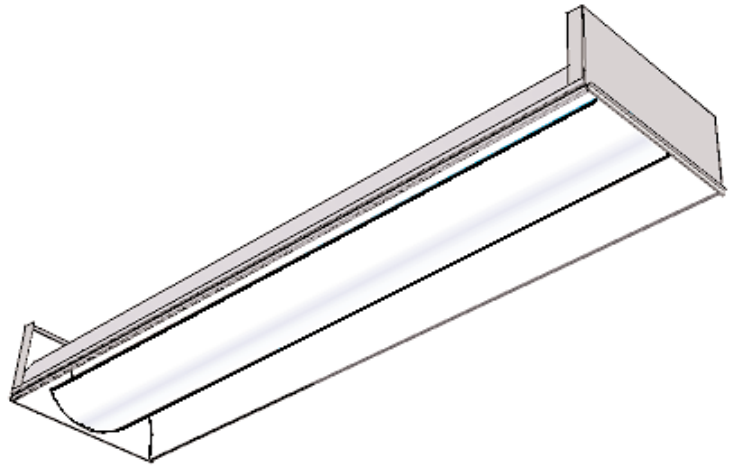


Patent number 6,746,325



Mounting Methods



Features



Dimensions

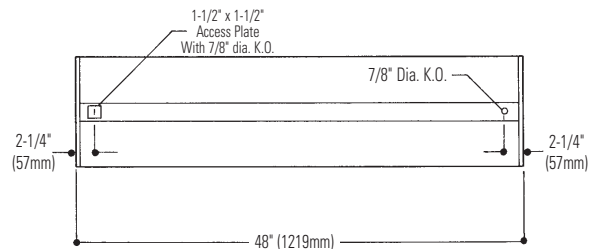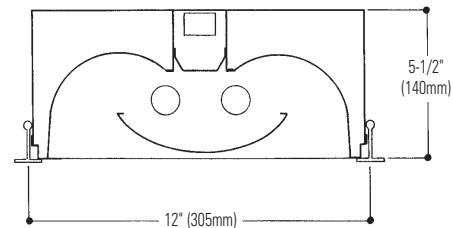

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

Lightolier a Genlyte company

www.lightolier.com

Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2005 a Genlyte company

Section 5/Folio M15-20

